




Controller V 10

Efficient and easy to use controller for micro-dispensing jet valve P-Dot/P-Jet



Features

- Single shot operation
- Continuous shot operation at 1 to 50 Hz
- External trigger input
- Trigger via potential-free contact
- Output for pulse counter

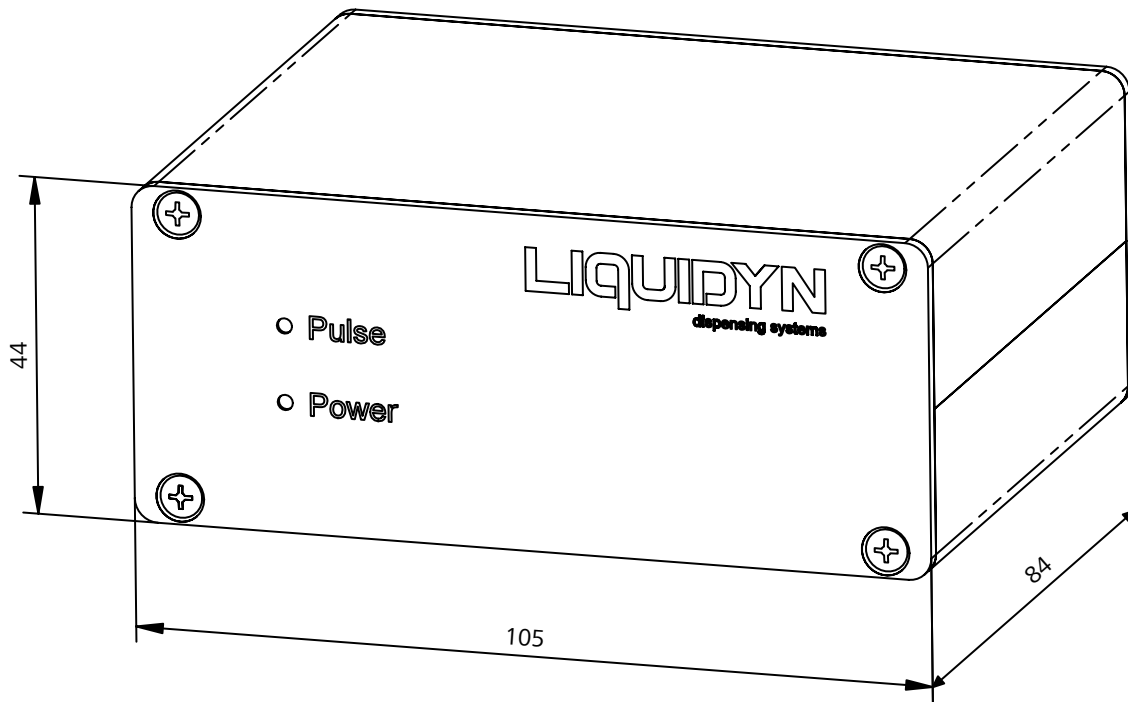

Specifications

Integrated Dispensing Systems
PO Box 271
Banbury
OX16 9NF

Phone +44 1295 277731
Fax +44 1295 277732

enquiries@fluidmetering.co.uk
www.fluidmetering.co.uk

Dimensions	105 x 84 x 44mm
Operating voltage	24 V DC
Current consumption max.	0,3 A
Ambient temperature range	5 to 50° C
Relative air moisture	max 80%
Input	0 to 24 V (0 to 4 V low level, 6 to 24 V high level)
Output	24 V
Output value counter	24 V
Electrical connection	Sub-D-connector 25 pin